


## TECHNICAL DATA SHEET

### SAB- PZ 40/300

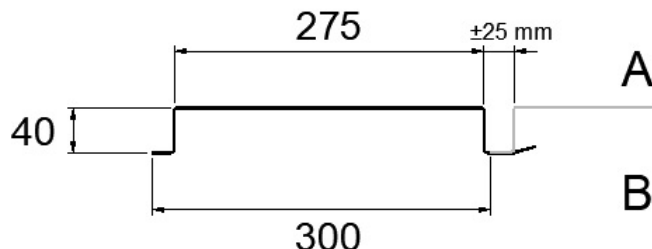

Gauge	Weight
0,75 mm	8,18 kg/m <sup>2</sup>
0,88 mm	9,59 kg/m <sup>2</sup>

### STEEL GRADE

Yield strength minimum 280 N/mm<sup>2</sup>, zinc layer can be Z, AZ, ZA or ZM.

### SUSTAINABILITY

Environmentally relevant product information (EPD) are published on [www.sabprofil.com](http://www.sabprofil.com).

### QUALITY CONTROLE

We guarantee that the product has been produced according the valid standards and directives

### REACTION TO FIRE

Incombustible, class A1 according to EN 13501-1 for coating systems unto 65 µm

### SPANS

SAB advices for an as flat as possible façade a maximum load span of 1500 mm. This load span is valid in all wind areas, vacant and till a construction height of 15 m.  
Maximum length 7500 mm.

### STANDARDS

Production according ISO 9001, ISO 14001, ISO 45001 and BES 6001

Tolerances according PPA-Europe Quality Regulations

Steel thickness: EN 10143 is used as a basis for the gauge tolerances, applied to the steel core only and excluding zinc layer and organic coating.

IJsselstein, June 2025