


## TECHNICAL DATA SHEET

### SAB Sandwich Wall panels FM Approved (W-FA-TL)

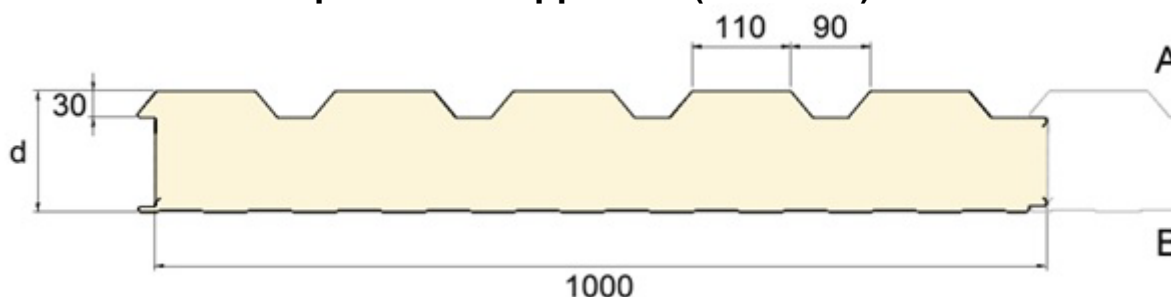

Thickness	Weight*	U-value	Reaction to fire	Sound insulation
65/95 mm	12,60 kg/m <sup>2</sup>	0,26 W/m <sup>2</sup> K	B-s2, d0	26dB
105/135 mm	14,20 kg/m <sup>2</sup>	0,17 W/m <sup>2</sup> K	B-s2, d0	26dB

\*Outer skin steel 0,63 mm  
Inner skin steel 0,40 mm

#### STEEL GRADE

Yield strength minimum 280 N/mm<sup>2</sup>, zinc layer can be Z, AZ, ZA or ZM.

#### CORE MATERIAL

Fire safe, CFC-, HCFC- and fibre-free polyisocyanurate foam (PIR) with a closed cell structure.

#### WIND AND WATER TIGHTNESS

$q_{v,10} = 0,130 \text{ dm}^3/\text{s}$  according EN 12114

Class B according EN 14509

#### SUSTAINABILITY

Environmentally relevant product information (EPD) are published on [www.sabprofil.com](http://www.sabprofil.com).

#### QUALITY CONTROLE

Factory production control according EN 14509 and additional voluntary external production control.

#### SPANS

Depend on wind loads, deflection limitations and safety factors.

See our SAB-brochure for more information.

#### STANDARDS

FM approved according 4880 and 4881 without height limitations

Production according ISO 9001, ISO 14001, ISO 45001 and BES 6001

CE-marking and Declaration of Performance according EN 14509

Tolerances according PPA-Europe Quality Regulations

U-value according EN 14509 including impact of the joint

Steel thickness: EN 10143 is used as a basis for the gauge tolerances, applied to the steel core only and excluding zinc layer and organic coating.

IJsselstein, June 2025



SAB-profiel bv | Produktieweg 2, NL-3401 MG IJsselstein | Postbus 97, NL-3400 AB IJsselstein

T +31 (0)30 68 79 700 | [info@sabprofil.nl](mailto:info@sabprofil.nl) | [www.sabprofil.nl](http://www.sabprofil.nl) | KvK 30032168

BNP Paribas nr. 22.76.82.548 | BIC: BNPNL2A | IBAN: NL15 BNPA 0227 6825 48

BTW NL001720971B01 | BTW DE164798556 | Steuernummer 116/5963/0134