


TECHNICAL DATA SHEET

SAB Sandwich Roofing panels (D-TG-Eco)

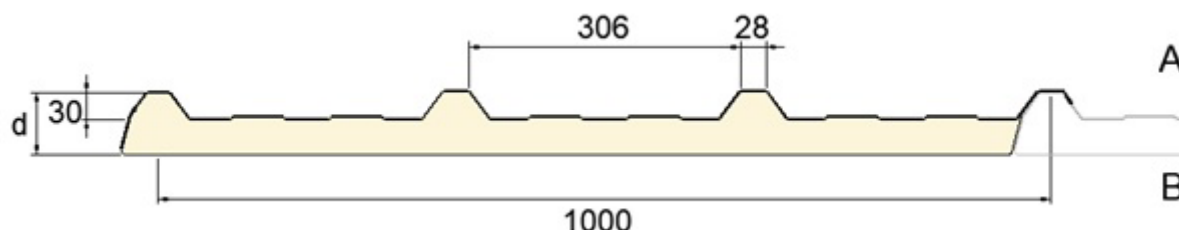

Thickness	Weight*	U-value	Reaction to fire	Sound insulation
40/70 mm	6,55 kg/m ²	0,46 W/m ² K	B-roof	26dB

*Outer skin steel 0,50 mm
Inner lining embossed aluminium foil < 0,01 mm

STEEL GRADE

Yield strength minimum 280 N/mm², zinc layer can be Z, AZ, ZA or ZM.

CORE MATERIAL

Fire safe, CFC-, HCFC- and fibre-free polyisocyanurate foam (PIR) with a closed cell structure.

WIND AND WATER TIGHTNESS

Class B according EN 14509

SUSTAINABILITY

Environmentally relevant product information is published on the [SAB-website](https://www.sabprofiel.nl).

QUALITY CONTROLE

Factory production control according EN 14509 and additional voluntary external production control.

SPANS

Depend on wind loads, deflection limitations and safety factors.
See our SAB-brochure for more information.

STANDARDS

Production according ISO 9001, ISO 14001, ISO 45001 and BES 6001
CE-marking and Declaration of Performance according EN 14509
Tolerances according PPA-Europe Quality Regulations
U-value according EN 14509 including impact of the joint
Steel thickness: EN 10143 is used as a basis for the gauge tolerances, applied to the steel core only and excluding zinc layer and organic coating.

IJsselstein, August 2026