


TECHNICAL DATA SHEET

SAB Sandwich Wall panels (W120-150 FR)

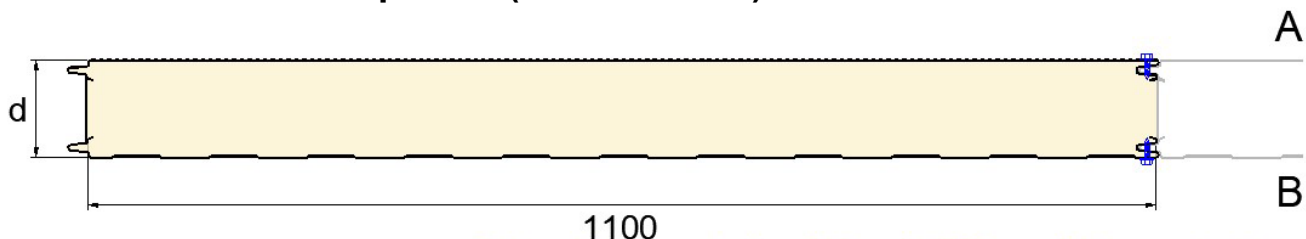

Joint stitching, outer and inner skin every *333 mm or no **extra stitching

Thickness	Weight*	U-value	Fire Resistance	Reaction to fire	Sound insulation
120 mm	12,60 kg/m ²	0,17 W/m ² K	EW60*	B-s2, d0	26dB
150 mm	13,80 kg/m ²	0,14 W/m ² K	EW60**	B-s2, d0	26dB

*Outer skin steel 0,50 mm
Inner skin steel 0,40 mm

STEEL GRADE

Yield strength minimum 280 N/mm², zinc layer can be Z, AZ, ZA or ZM.

CORE MATERIAL

Fire safe, CFC-, HCFC- and fibre-free polyisocyanurate foam (PIR) with a closed cell structure.

FIRE RESISTANCE

Class EW60 according EN 13501-2.

For additional facilities and information regarding fire resistance, see the [SAB-website](#)

WIND AND WATER TIGHTNESS

$q_{v,10} = 0,130 \text{ dm}^3/\text{s}$ according EN 12114

Class B according EN 14509

SUSTAINABILITY

Environmentally relevant product information are published on [SAB-website](#)

QUALITY CONTROLE

Factory production control according EN 14509 and additional voluntary external production control.

SPANS

Depend on wind loads, deflection limitations and safety factors.

See our SAB-brochure for more information.

STANDARDS

Production according ISO 9001, ISO 14001, ISO 45001 and BES 6001

CE-marking and Declaration of Performance according EN 14509

Tolerances according PPA-Europe Quality Regulations

U-value according EN 14509 including impact of the joint

Steel thickness: EN 10143 is used as a basis for the gauge tolerances, applied to the steel core only and excluding zinc layer and organic coating.

IJsselstein, June 2025